
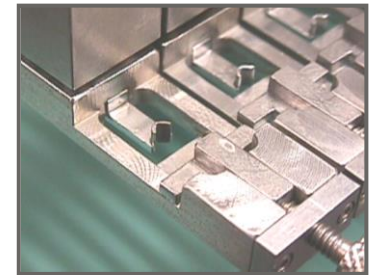
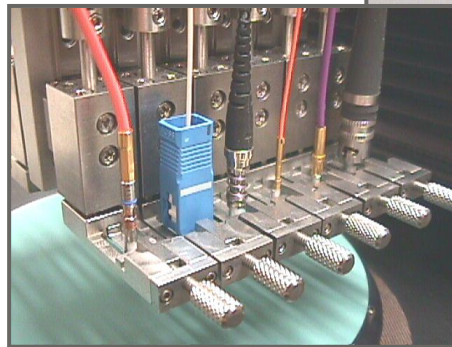


SUPPORTS UPC COMPONENTS:

- CONNECTORS
- BARE FERRULES
- MIL-SPEC TERMINI / CONTACTS

INDEPENDENT SUSPENSION
OPTICALLY ALIGNED FIXTURE
TELCORDIA COMPLIANT
IN-LINE VIDEO INSPECTION

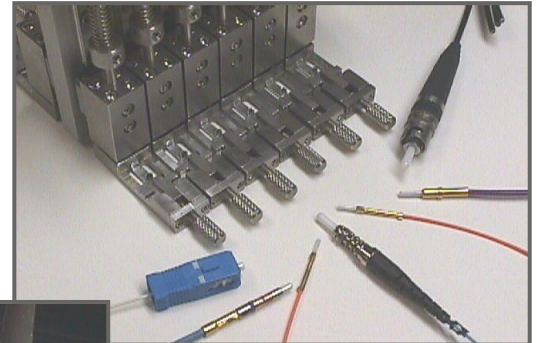

SPECIFICATIONS AND FEATURES

Polisher Compatibility

NOVA™
Scepter™
SpecPro™
Rev™
Proton™

Capacity (polisher dependent)
Up to 12 components

Component Engagement
Precision v-groove mechanism

Ferrule Diameter Support

Standard 1mm to 3.2mm Connector Capacity
Modified fixtures available for smaller diameters

UPC Component Support

Connectors

SC, FC, ST, LC, MU, E2000, F3000, SMA, ferrules, bare fiber adapters

Mil-spec Termini

M29504 (1, 1.25, 1.6, 2mm), TFOCA, ARINC 801

EXAMPLES

